

DESIGN AND BEAM DYNAMICS STUDIES OF A MULTI-ION LINAC INJECTOR FOR THE JLEIC ION COMPLEX

Speaker: P.N. Ostroumov

Contributors: A. Plastun, B. Mustapha and Z. Conway

Outline


- ❑ JLAB-based Electron Ion Collider

- ❑ Multi-ion pulsed injector Linac

- ❑ Key Linac Components
 - ❑ Heavy-ion source
 - ❑ Polarized light ion sources
 - ❑ Normal Conducting RFQ
 - ❑ IH Structure / RF Focusing Structure
 - ❑ High Performance Superconducting QWRs and HWRs
 - ❑ Optimized Stripping Energy & Charge State

- ❑ End-to-End Beam Dynamics


JLAB-Based Electron-Ion Collider

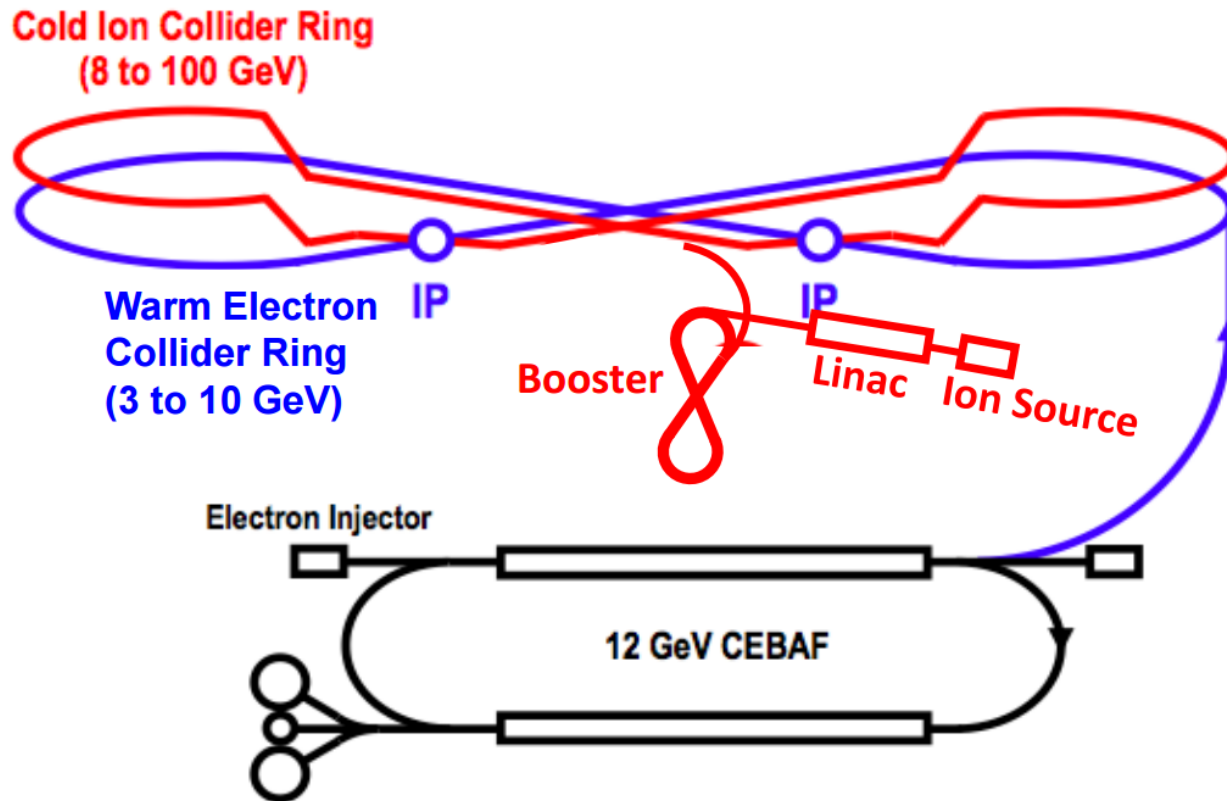


CEBAF is a **full energy injector**.

(Courtesy of F. Pilat)

Linac Design: Layout & Key Components

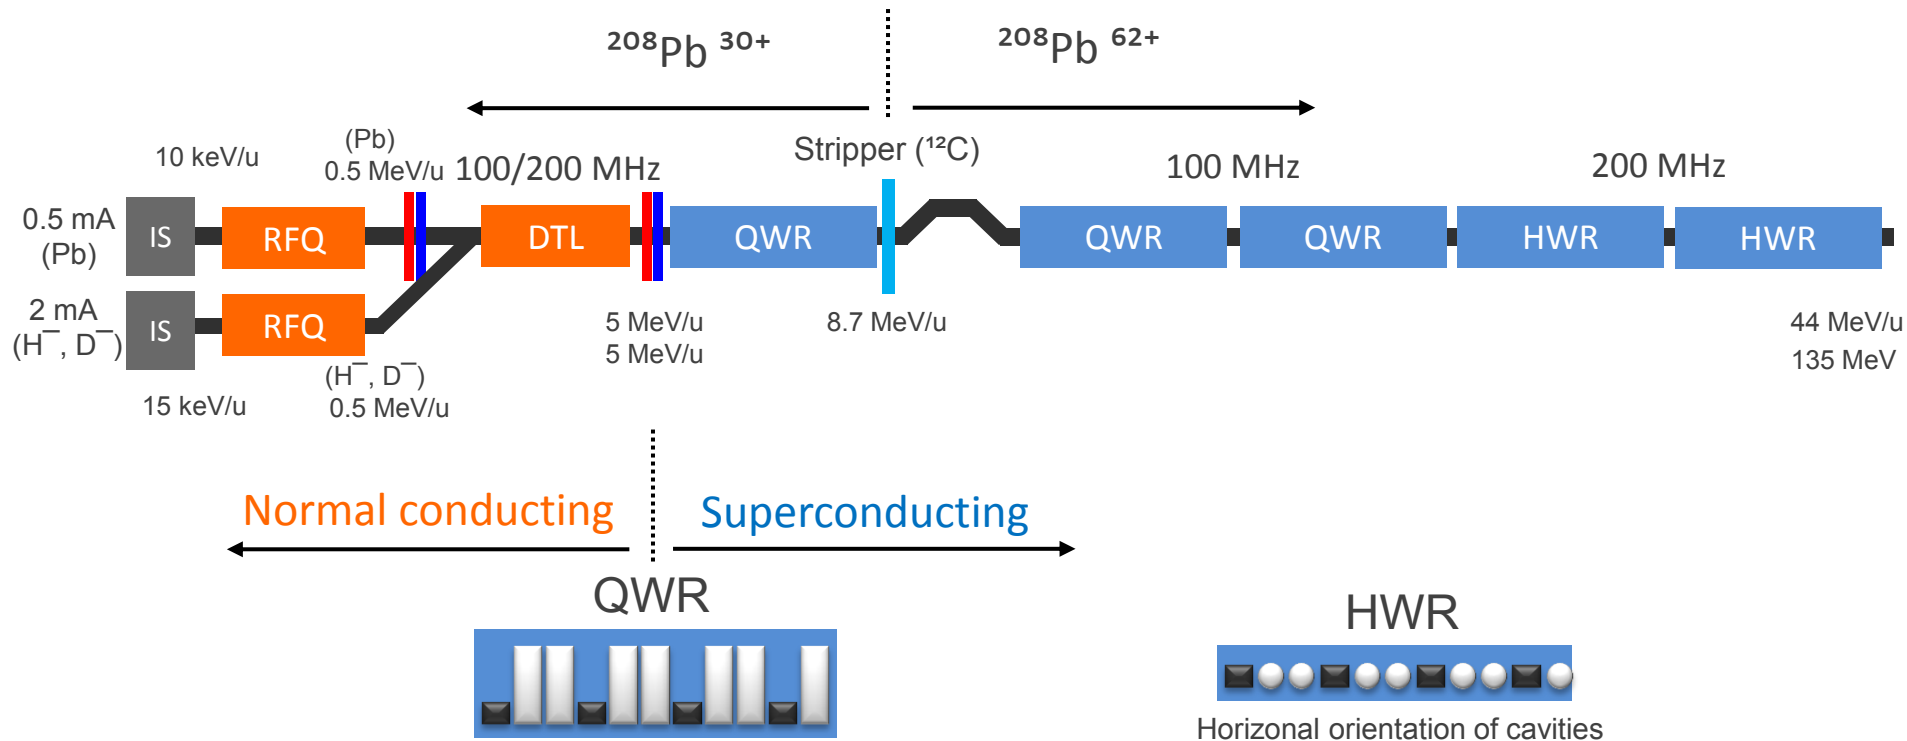


- ❑ A stripper for heavy ions for more effective acceleration: $\text{Pb}^{30+} \rightarrow 62+$
 - ❑ An option of stripping to Pb^{67+} is also investigated
 - ❑ H^- and light ions will be polarized
- ❑ Repetition rate: 10 Hz (Pb) and 5 Hz (H^-)
- ❑ Total linac length is ~ 50 m

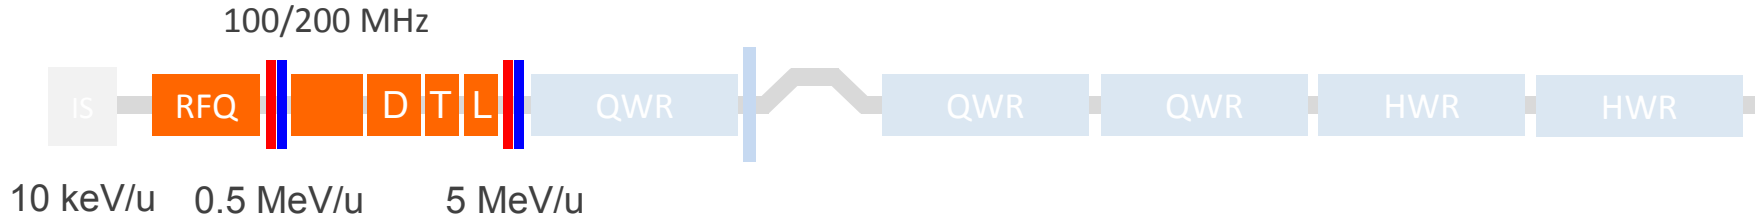


RT section

Normal Conducting Front-End: RFQs

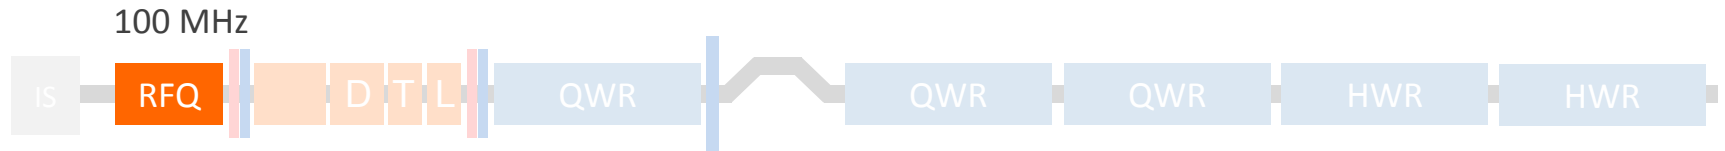


Parameter	Units	Heavy ion	Light ion
Frequency	MHz	100	
Energy range	keV/u	10 - 500	15 - 500
Highest A/Q		7	2
Length	m	5.6	2.0
Average radius	mm	3.7	7.0
Voltage	kV	70	103
Transmission	%	99	99
Quality factor		6600	7200
RF power consumption (structure with windows)	kW	210	120
Output longitudinal emittance (Norm., 90%)	π keV/u ns	4.5	4.9

Normal Conducting Front-End: RFQ

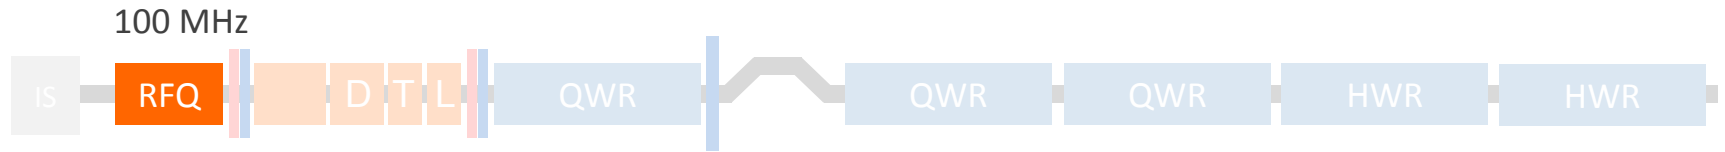

4-rod

✓ 4-vane with coupling windows

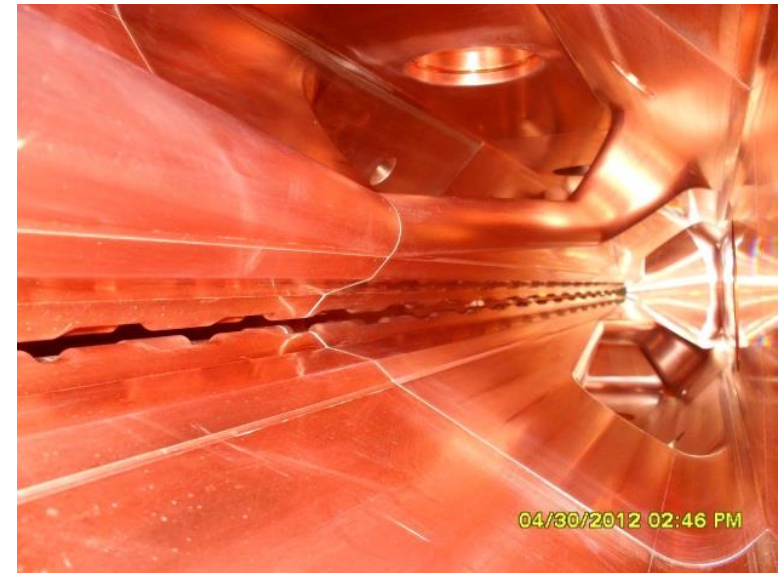

(Courtesy of J. Alessi)

Maximum A/Q:	~ 7
Frequency:	100 MHz
Energy:	10 – 500 keV/u
Voltage:	70 kV
Average radius:	3.7 mm
Length:	5.6 m
Power consumption:	210 kW

BNL's Heavy Ion 4-Rod RFQ

- Designed and built by Alvin Schempp
- 300 keV/u, $A/Q=6$



(Courtesy of J. Alessi)

Examples of Operating 4-vane Window-Coupled RFQs

The structure is proven by operation of several linacs:



ATLAS CW RFQ, 60 MHz, A/Q=7 (ANL, USA)



Heavy Ion Prototype, 27 MHz, A/Q=60 (ITEP, Moscow)




Heavy Ion Injector, 81 MHz, A/Q=3 (ITEP, Moscow)




Light Ion Injector, 145 MHz, A/Q=3 (JINR, Dubna)

Normal Conducting Front-End: IH Structure

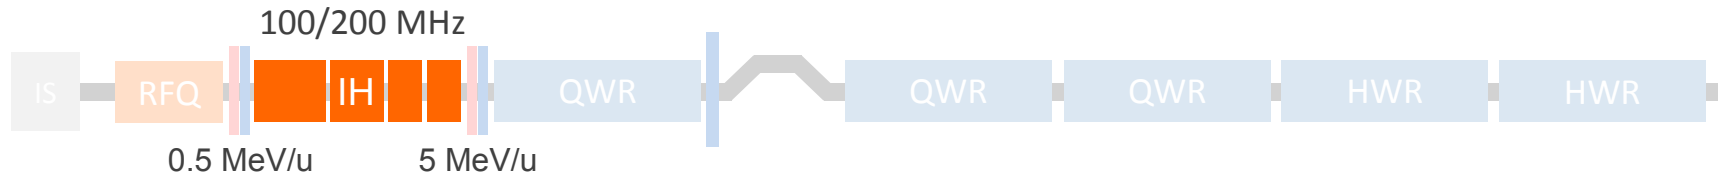


BNL EBIS Injector 100 MHz IH Structure
(Courtesy of J. Alessi)

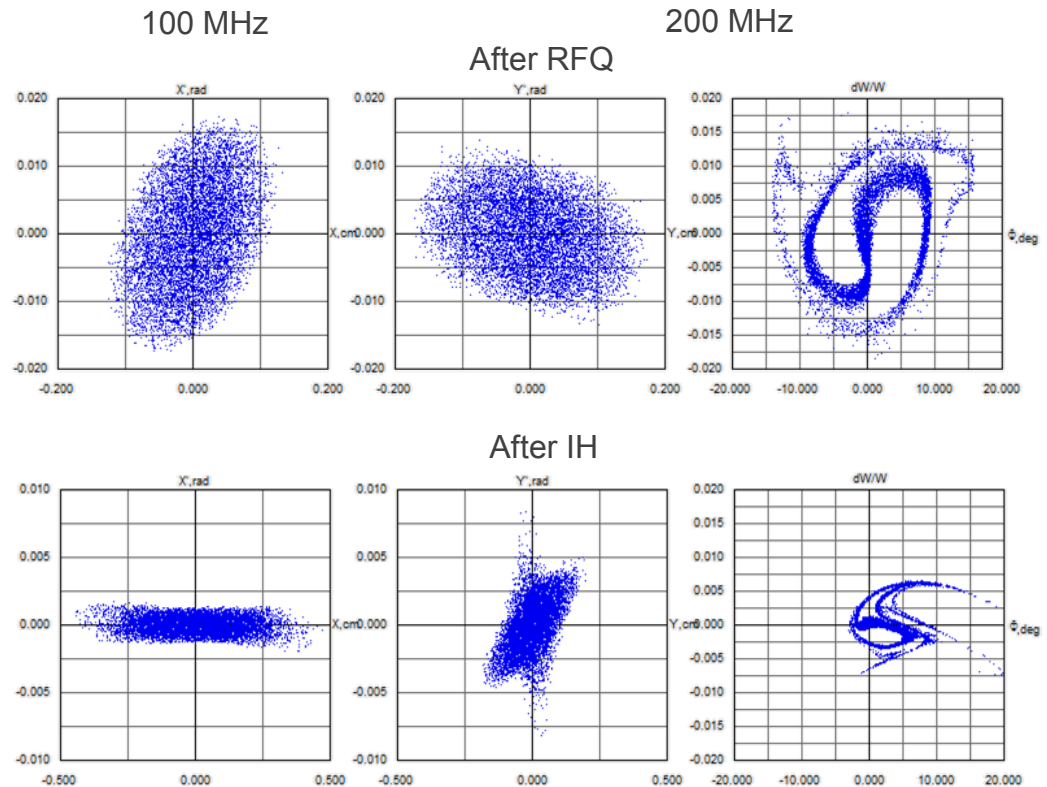


RF Focusing Structure: Alternative Option to IH-DTL

Spatially Periodic RF Quadrupole Linac



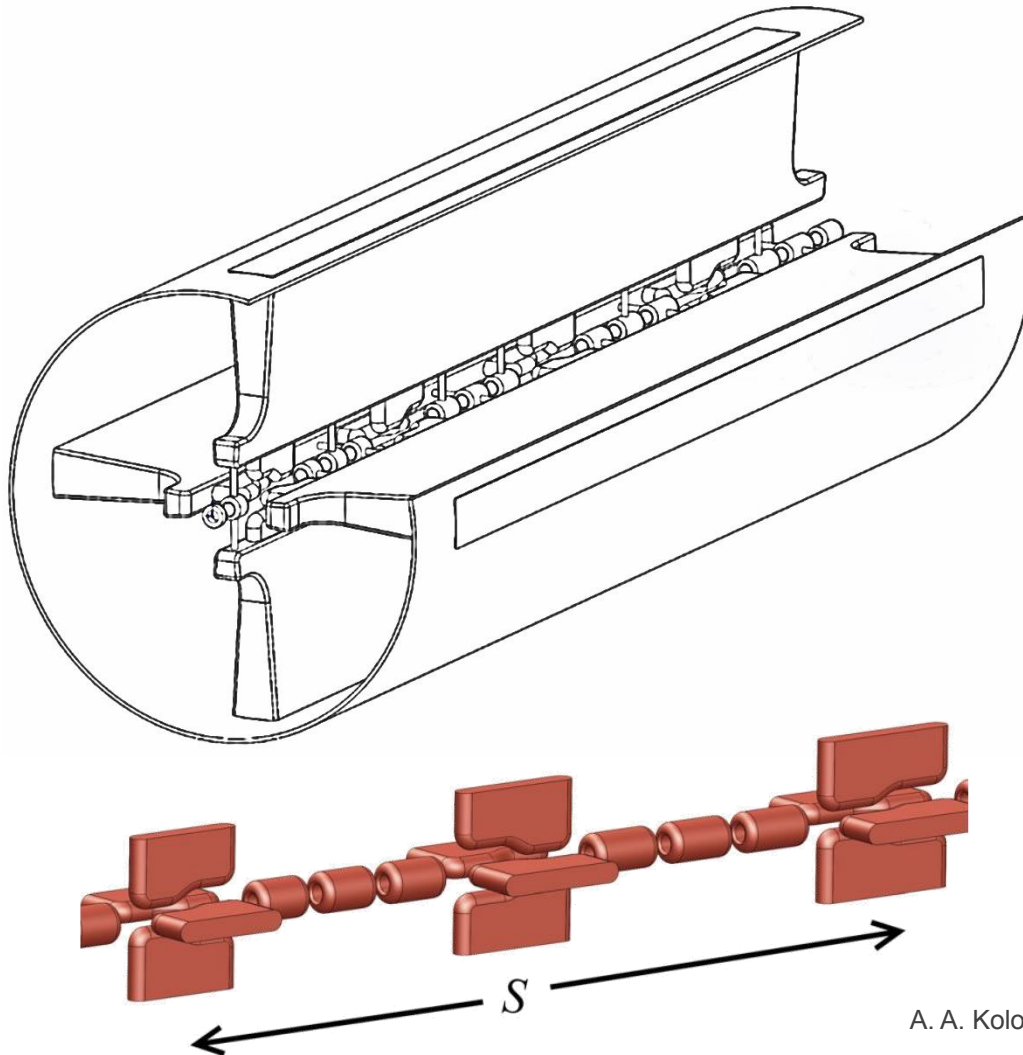



- ❑ In this velocity range, focusing by RF fields is very efficient
- ❑ Conventional longitudinal beam dynamics can be applied
- ❑ Real-estate accelerating gradient can be high as in IH structure
- ❑ Beam quality is better than in IH structure
- ❑ The resonator is 4-vane type as in a conventional RFQ

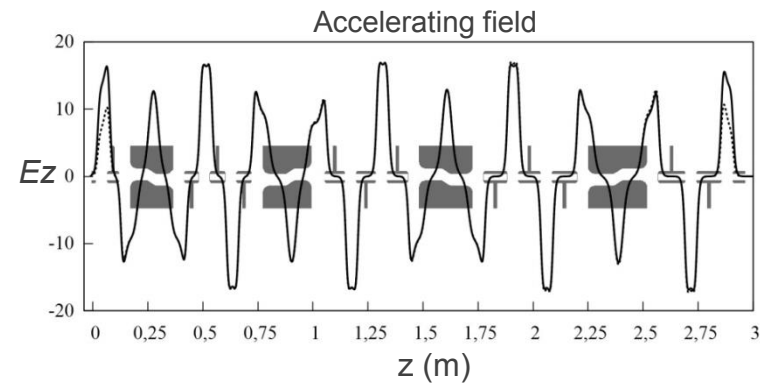

Spatially periodic radio-frequency quadrupole focusing linac
A. A. Kolomiets and A. S. Plastun, Phys. Rev. ST Accel. Beams **18**, 120101

Normal Conducting Front-End: RF Focusing Structure

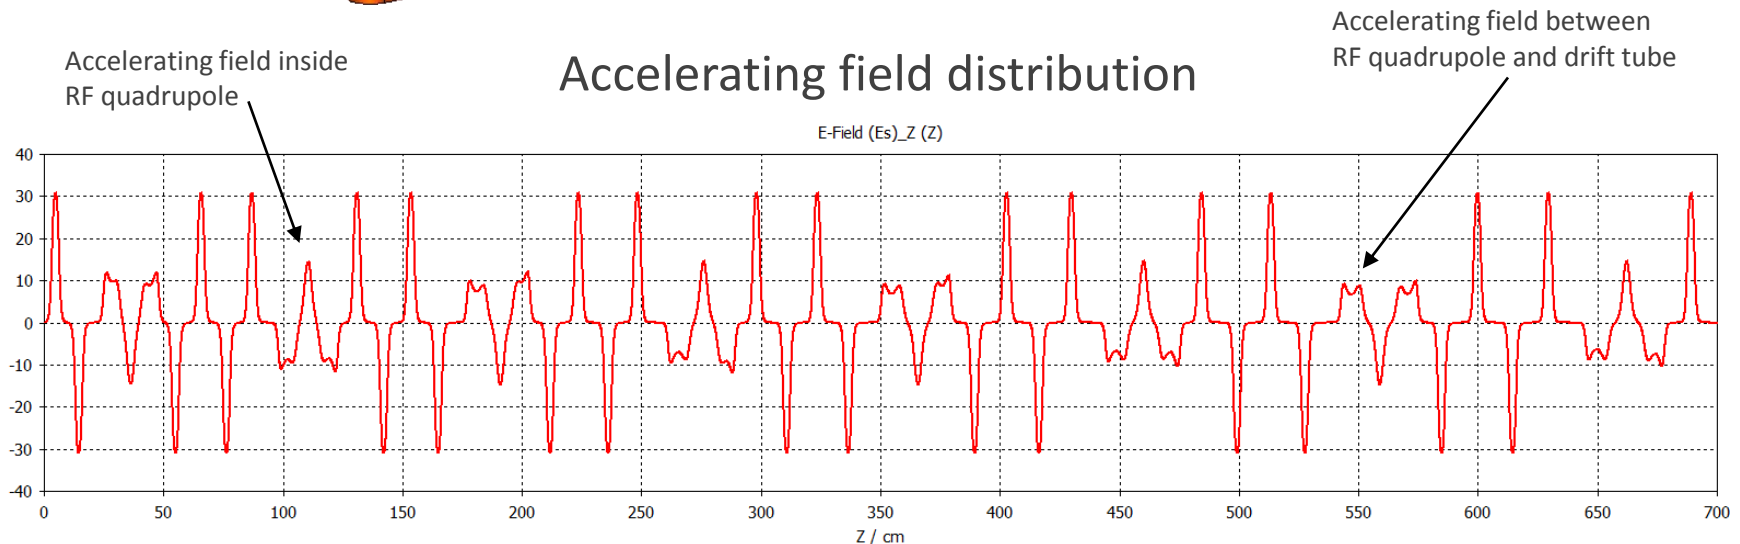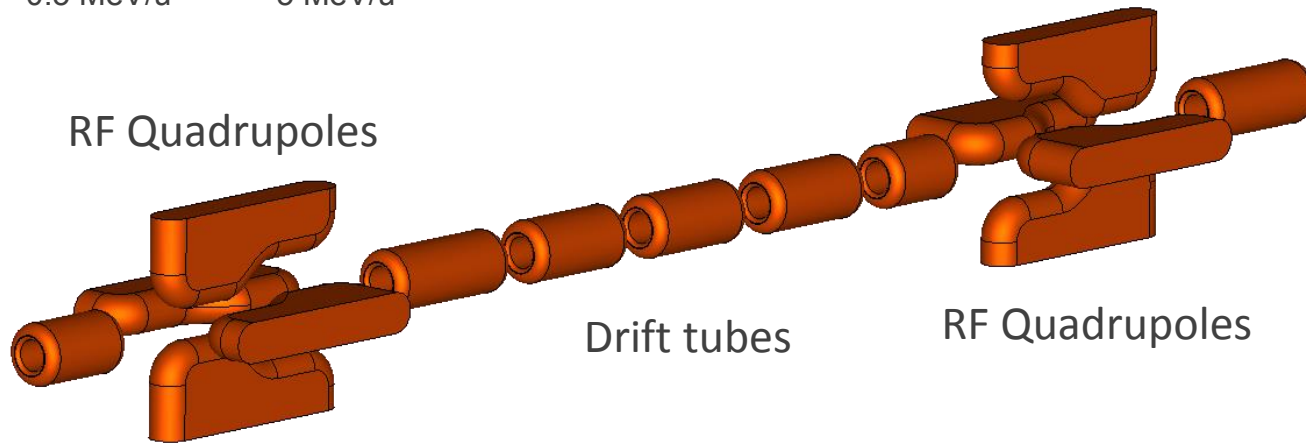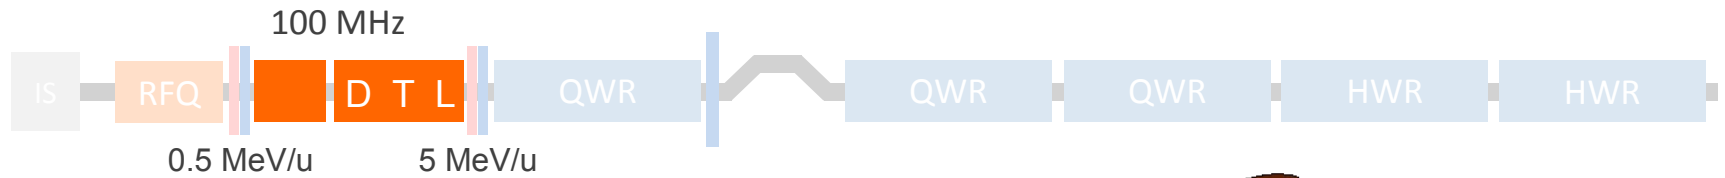

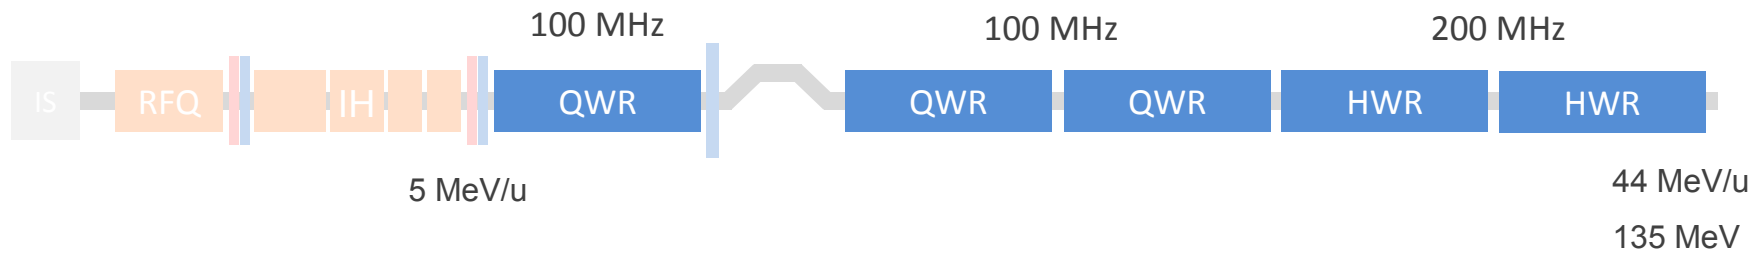

SC section


will operate at 4.5K in pulsed mode

High-Performance QWRs Developed at ANL

ATLAS
72 MHz QWR



SC section will operate at 4.5K in pulsed mode

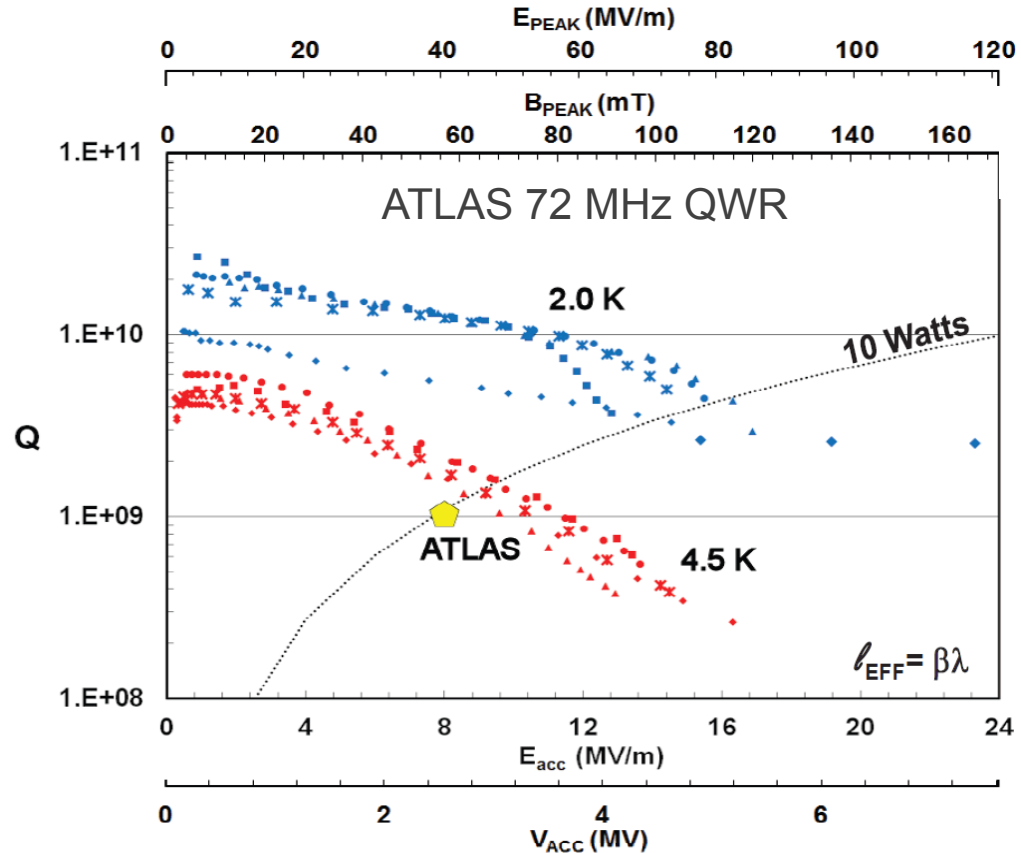


A single 72 MHz $\beta=0.077$ QWR is capable of delivering 4 MV voltage @ $E_{peak} \sim 64$ MV/m and $B_{peak} \sim 90$ mT in CW mode which corresponds to 5.6 MV @ 100 MHz and $\beta_{opt} = 0.15$.


We propose to operate 100 MHz $\beta=0.15$ QWRs in pulsed mode to produce 4.7 MV per cavity

High-Performance HWRs developed at ANL

FNAL - 162 MHz HWR

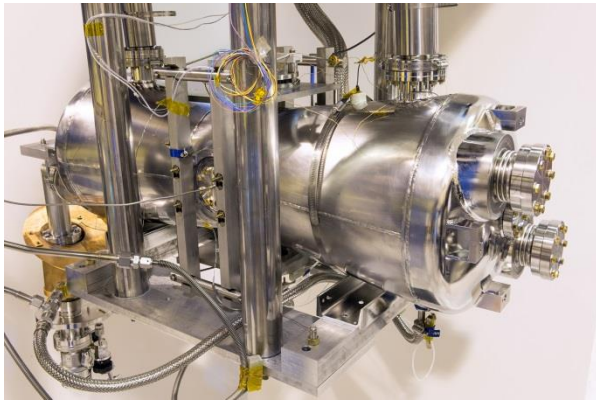

SC section will operate at 4.5K in pulsed mode

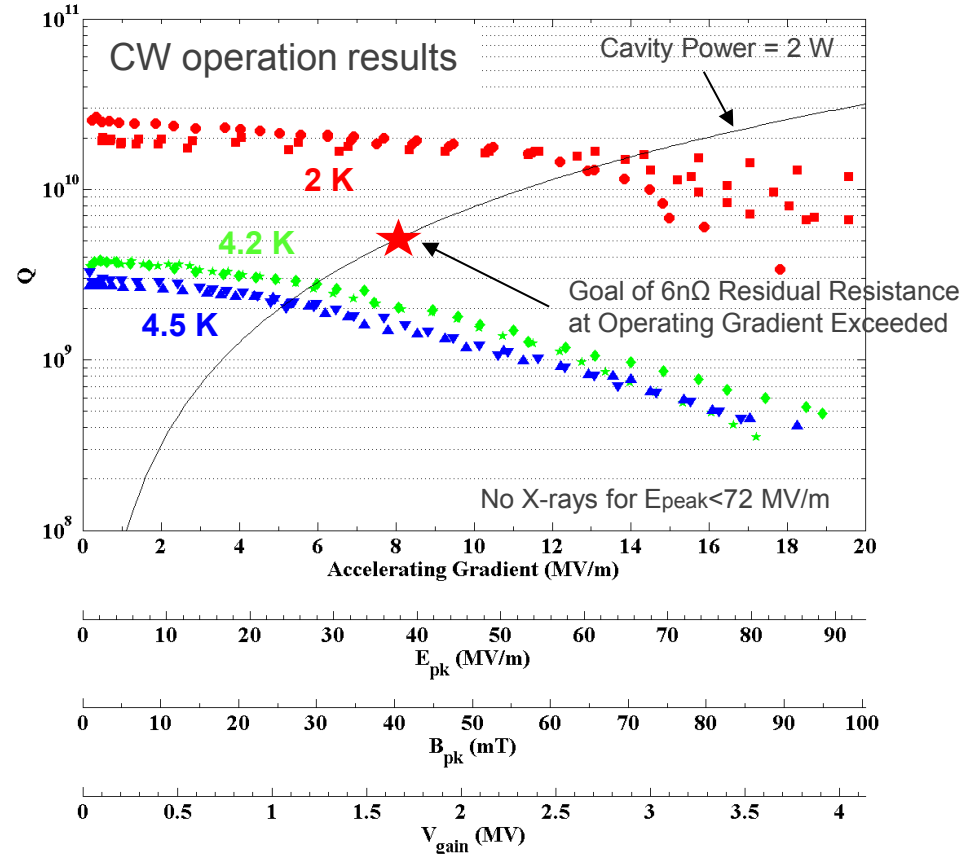


A single 162 MHz $\beta=0.11$ HWR is capable of delivering 3 MV voltage @ $E_{\text{peak}} \sim 68$ MV/m and $B_{\text{peak}} \sim 72$ mT in CW mode which corresponds to 6.6 MV @ 200 MHz and $\beta_{\text{opt}} = 0.3$.


We propose to operate 200 MHz $\beta=0.3$ HWRs in pulsed mode to produce 4.7 MV per cavity

Preliminary QWR and HWR Design for JLEIC Linac

JLEIC QWR Design

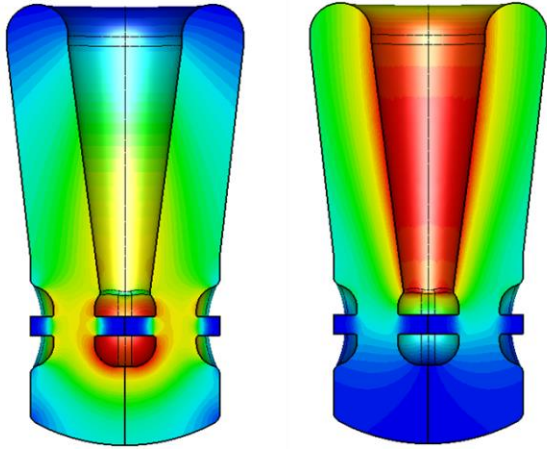


JLEIC HWR Design

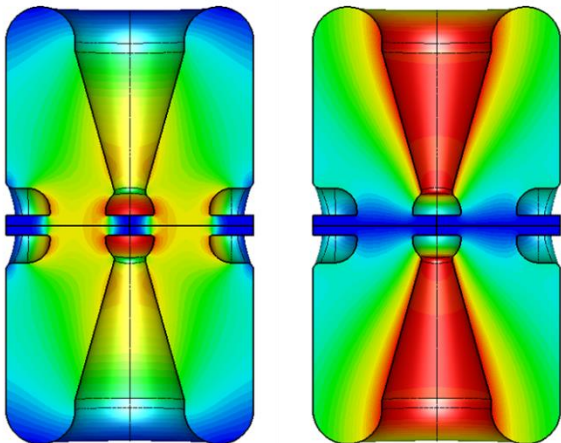

Parameter	QWR	HWR	Units
β_{opt}	0.15	0.30	
Frequency	100	200	MHz
Length ($\beta\lambda$)	45	45	cm
$E_{\text{PEAK}}/E_{\text{ACC}}$	5.5	4.9	
$B_{\text{PEAK}}/E_{\text{ACC}}$	8.2	6.9	mT/(MV/m)
R/Q	475	256	Ω
G	42	84	Ω
E_{PEAK} in operation	57.8	51.5	MV/m
B_{PEAK} in operation	86.1	72.5	mT
E_{ACC}	10.5	10.5	MV/m
Phase (Pb)	-20	-15	deg
No. of cavities	21	14	

Period Structure in SRF Section

QWRs are optimized to compensate beam transverse RF steering by tilting the drift tube faces

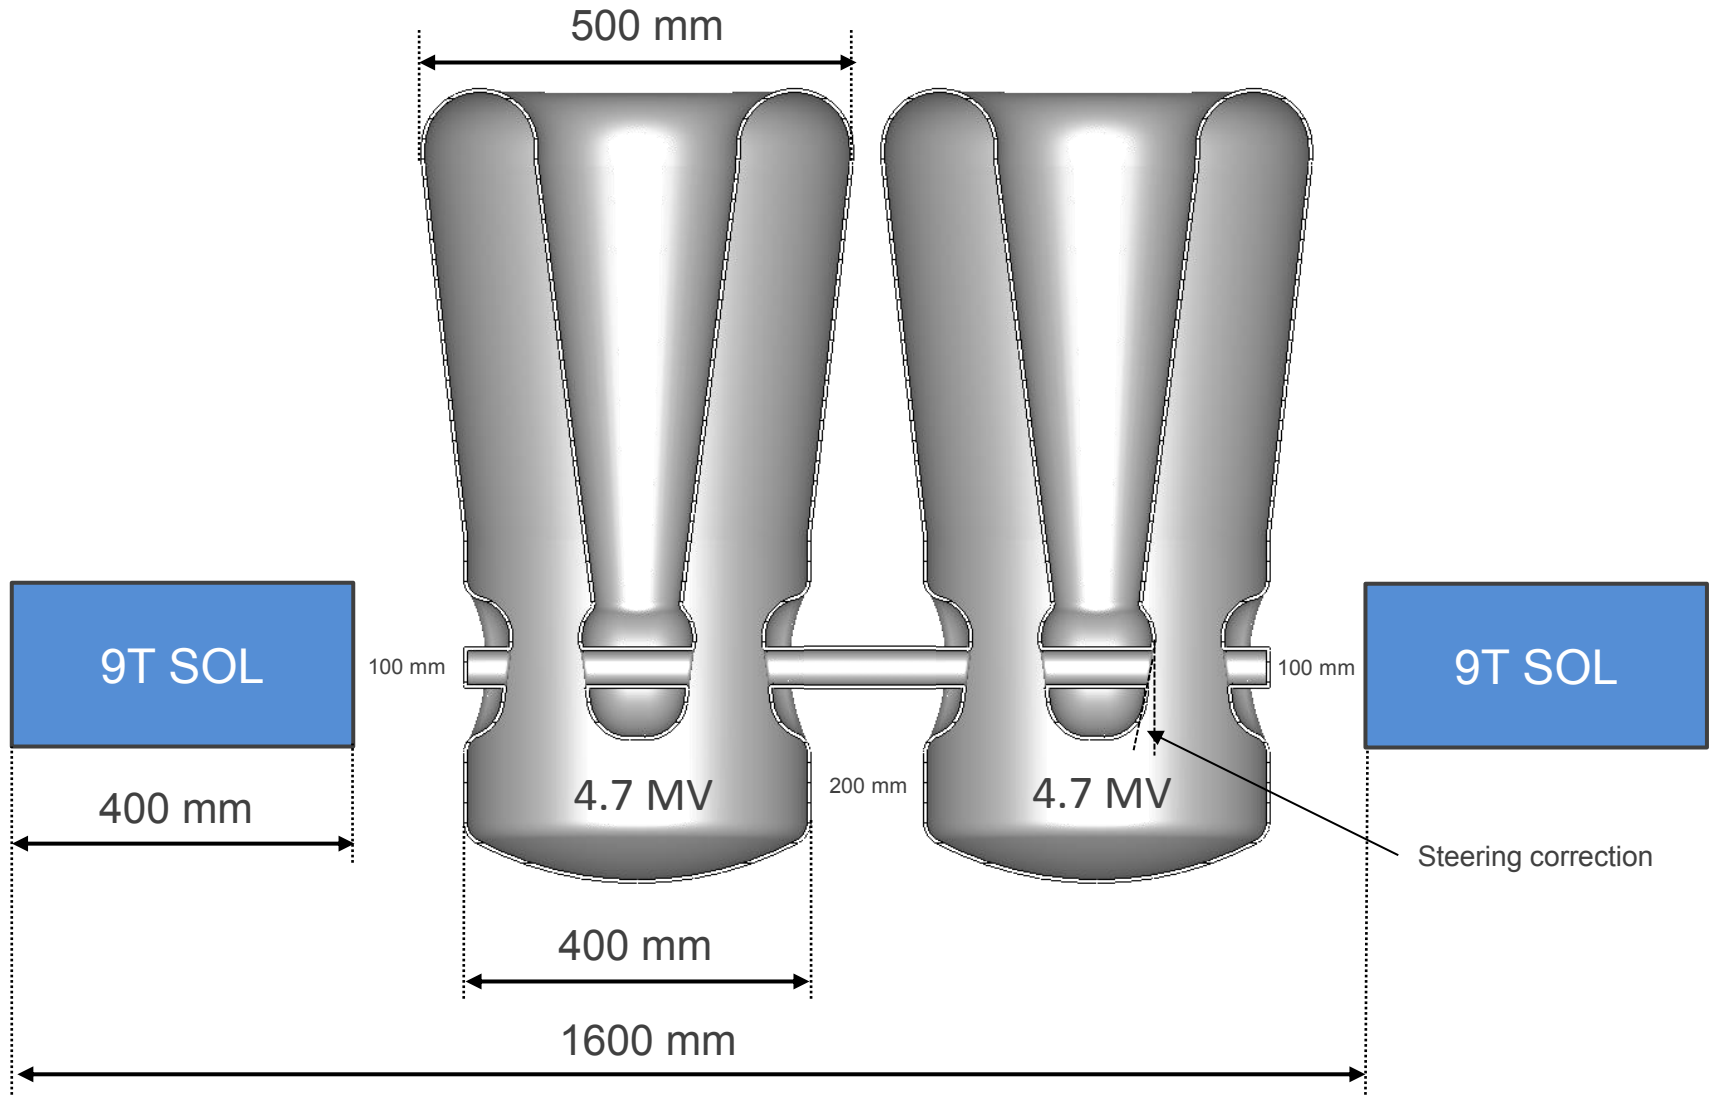

Optimized Stripping Energy & Charge State


Stripping efficiency:

(30+) → (62+) : 17.5% @ 8.7 MeV/u


(30+) → (67+) : 22% @ 13.3 MeV/u

$$U_{total} = \frac{\Delta W_1}{Q_1} + \frac{\Delta W_2}{Q_2}$$

1 – before stripping, 2 – after stripping

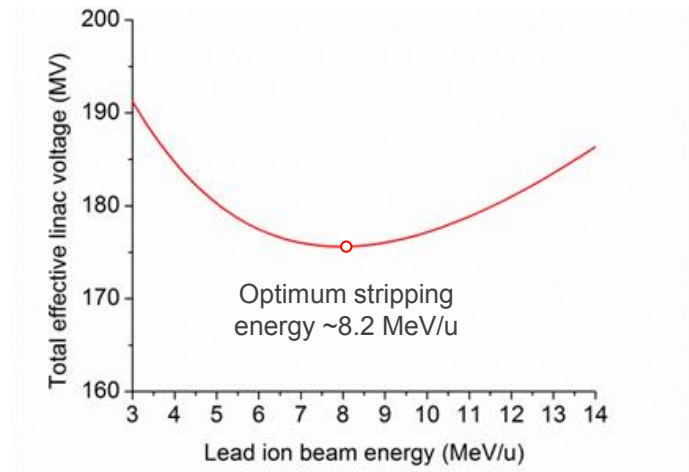


Beam Energy along the Linac

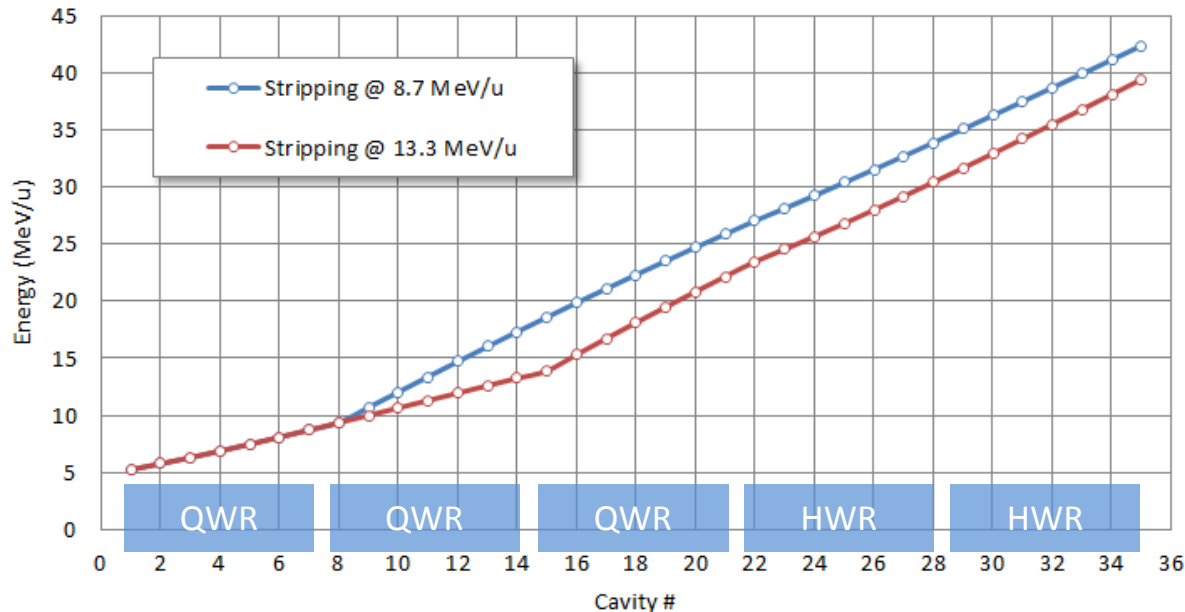

44 MeV/u (62+)

40 MeV/u (67+)

Voltage Profile & SRF Performance

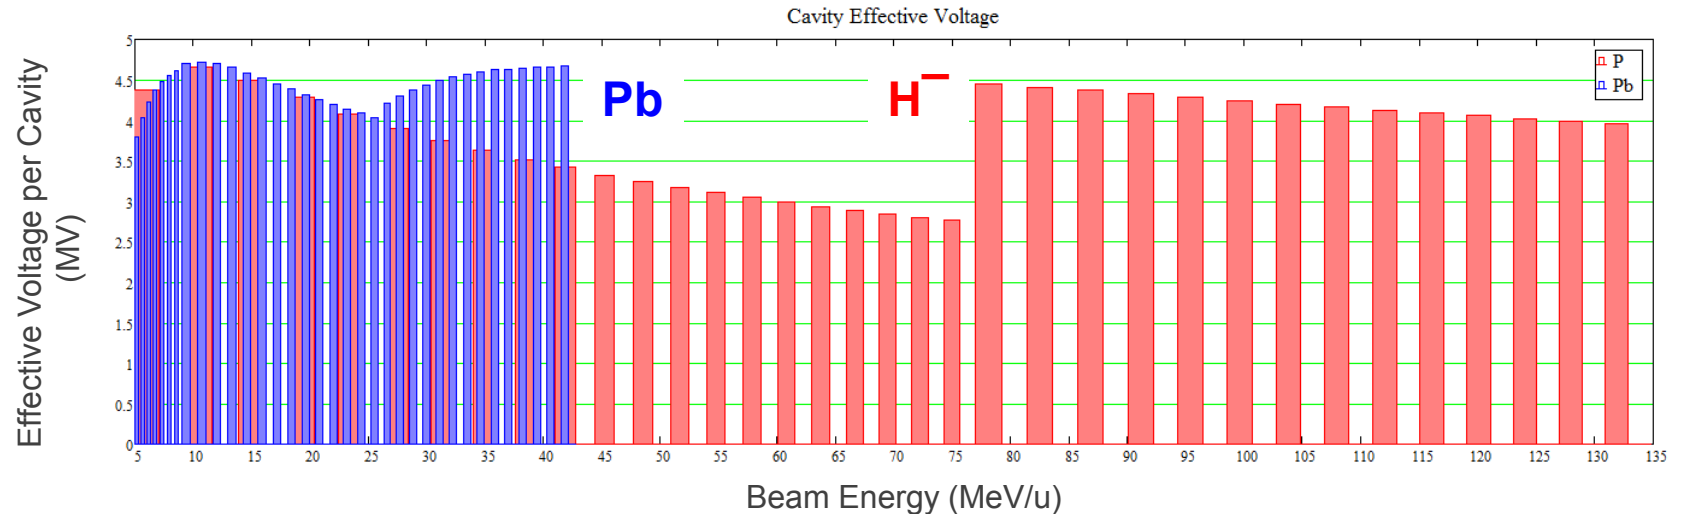

- ❑ SC Cavity Voltage profile optimized for both lead ions and protons/H⁻
- ❑ SC Cavity re-phasing produces much higher energy for protons/H⁻
- ❑ SC linac will operate in pulsed mode to reduce dynamic cryogenics load
 - 10% duty cycle during the booster filling time, SC cavities will be equipped with fast tuners to compensate for Lorentz detuning
 - 4.5K operation temperature
 - Total ~75 Watts of static load for 5 cryomodules
 - Can be used for other applications during the collider operation
 - Booster beam to fixed target experiments
 - Isotope production, for example, molybdenum-99


End-to-End Beam Dynamics Simulation - Lead Ions

with IH-DTL sections

MEIC Injector - Lead


Mar 17, 2016, 09:30:46

Mar 17, 2016, 09:40:35

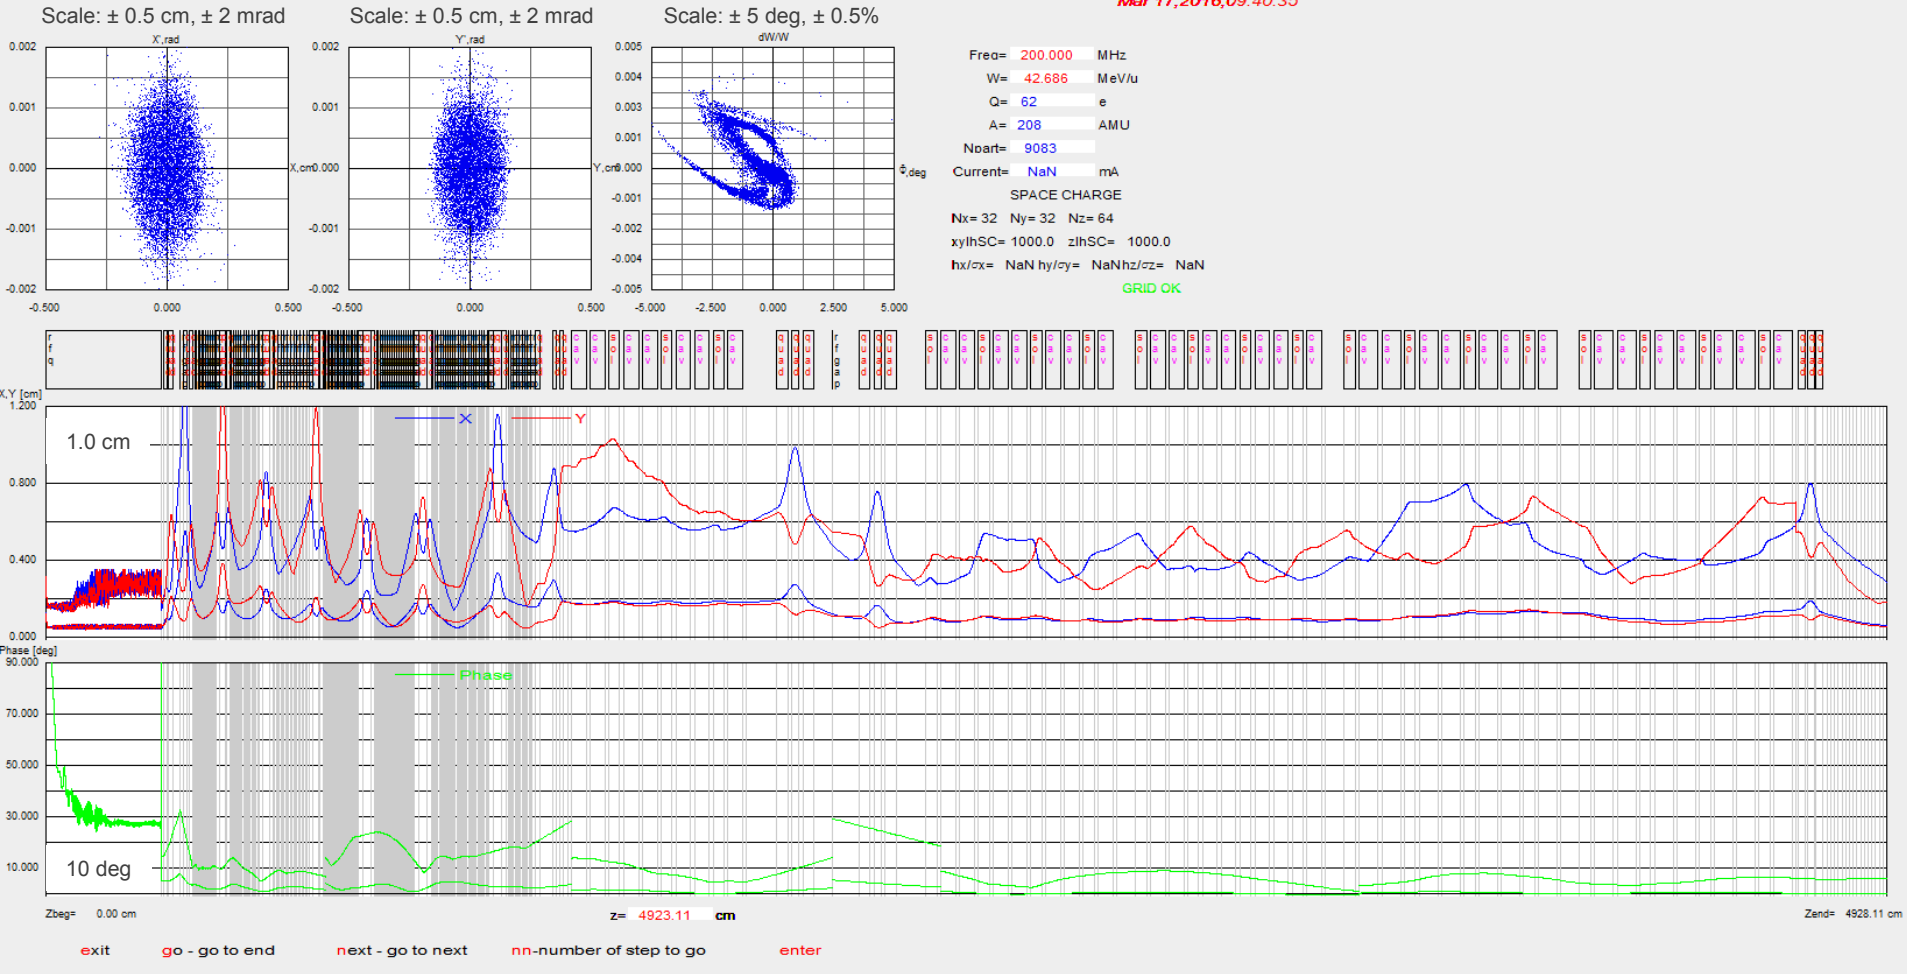


End-to-End Beam Dynamics Simulation - Lead Ions

with SP-RFQ sections

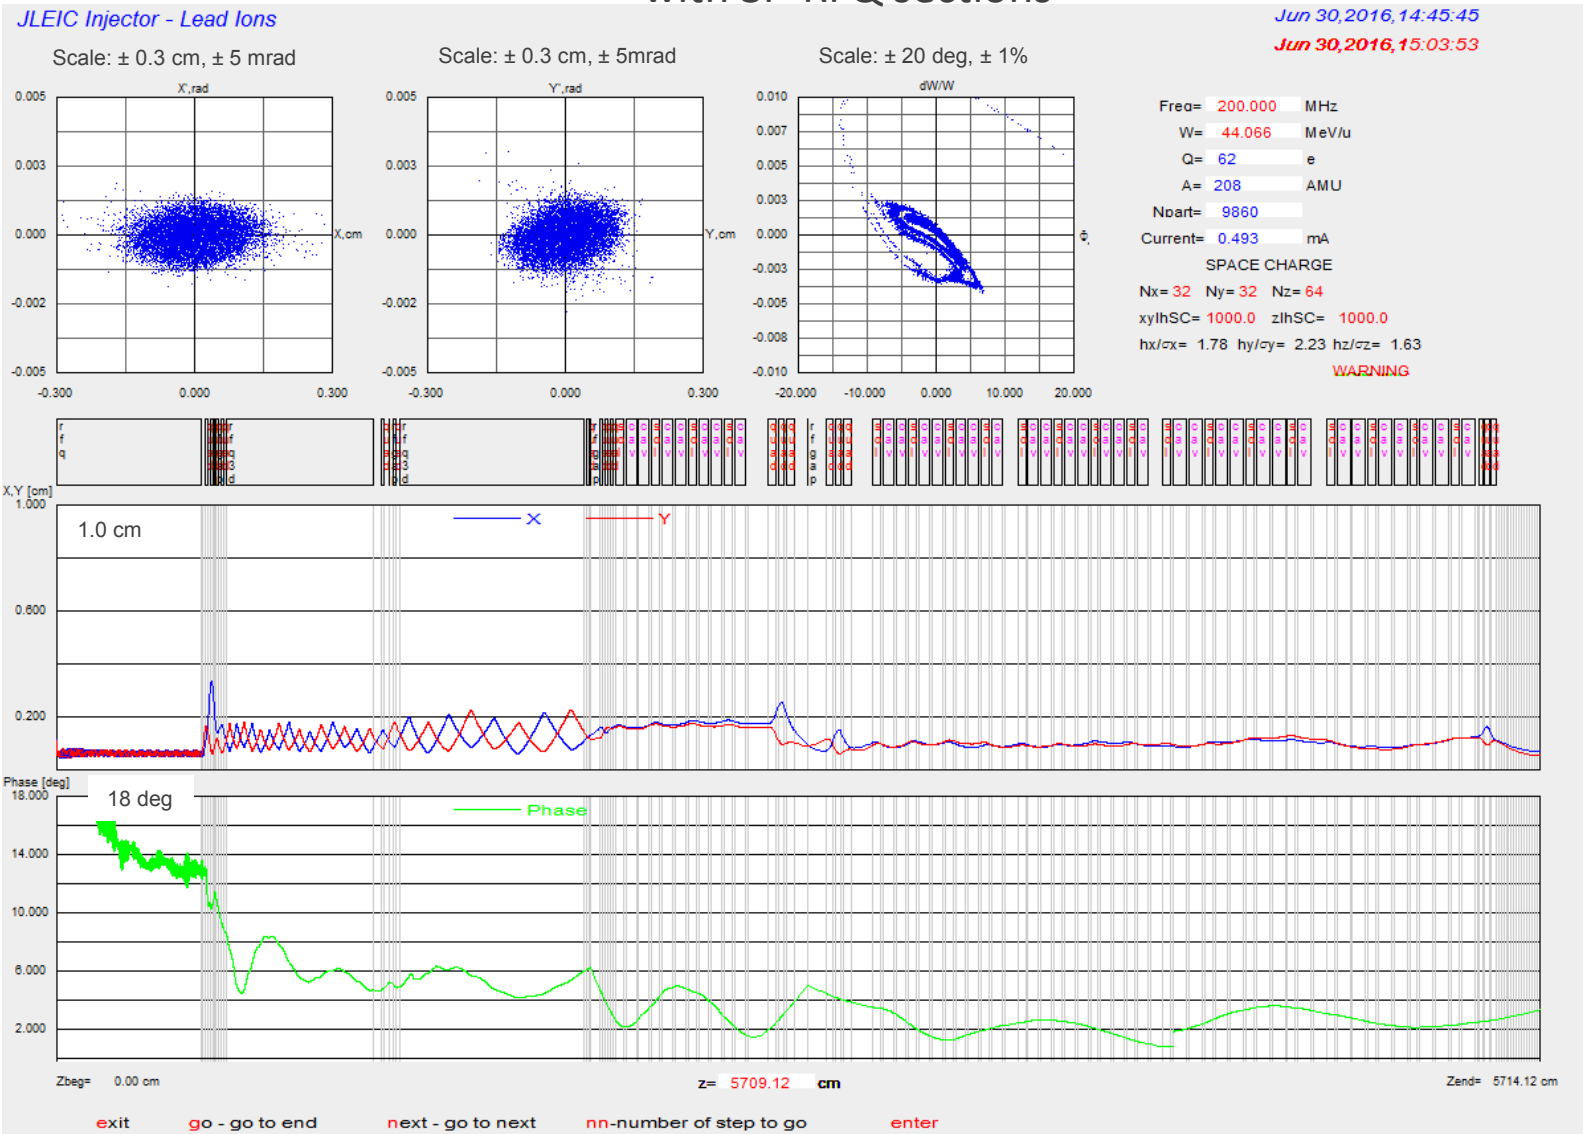

End-to-End Beam Dynamics Simulation - Protons/H⁻

with SP-RFQ sections

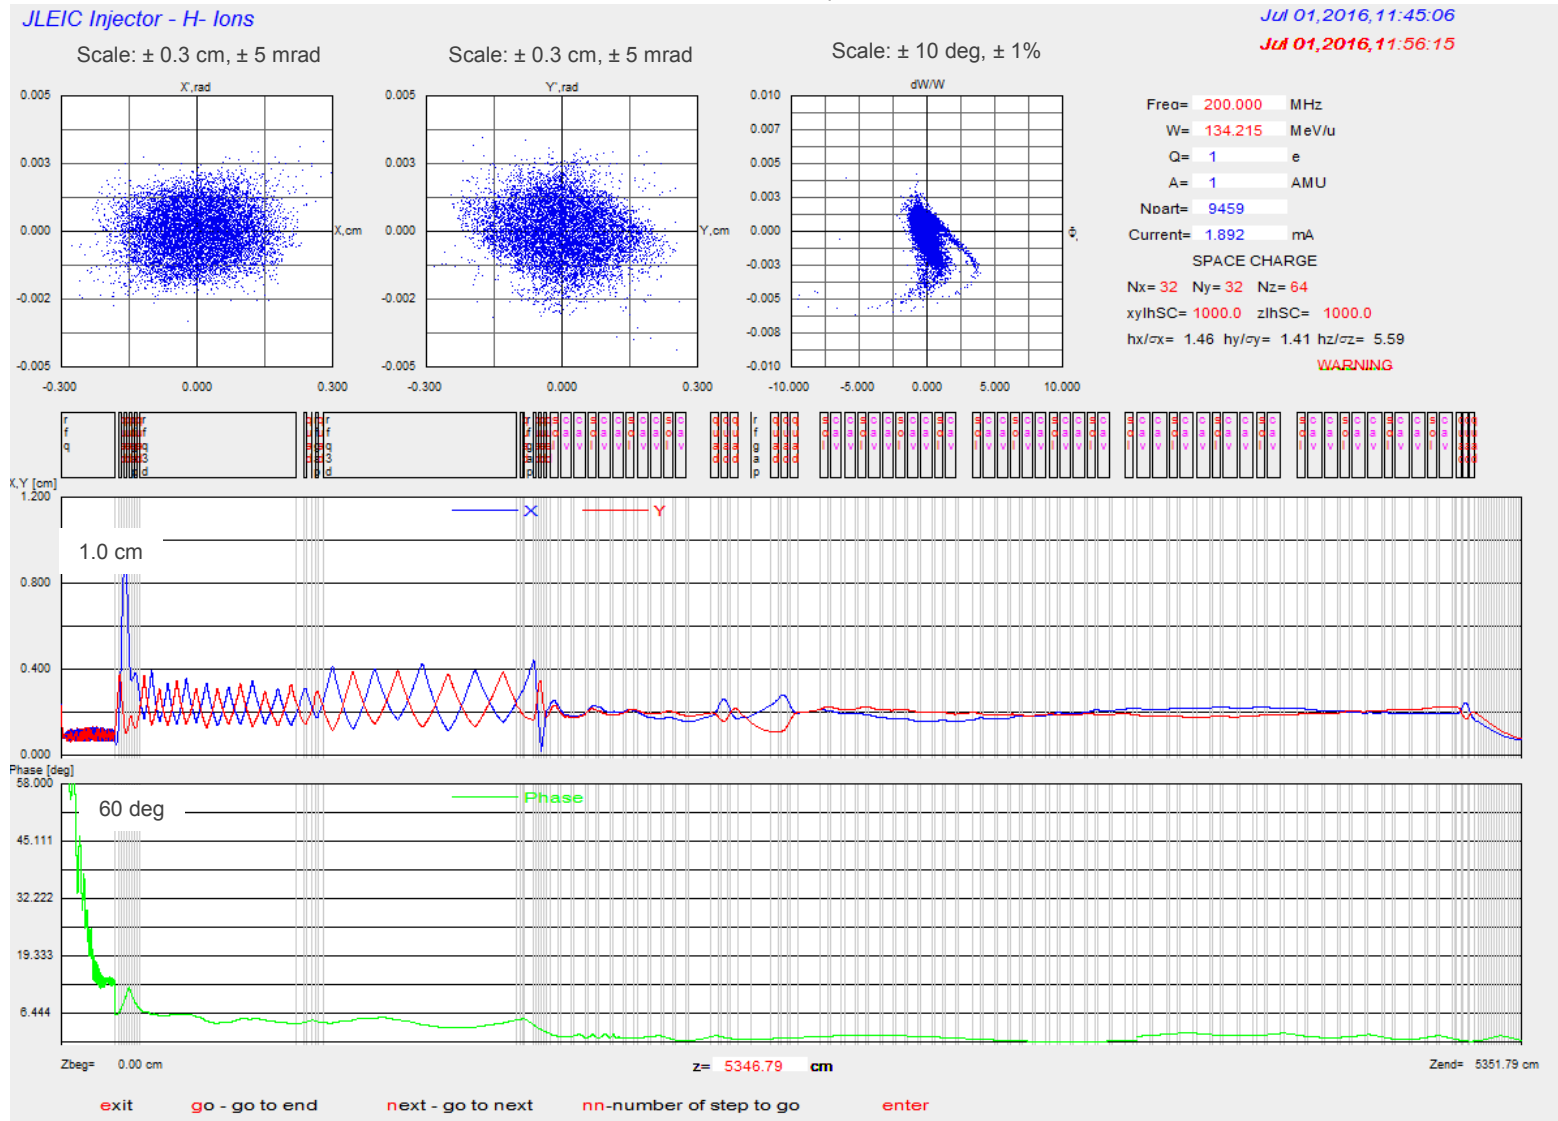

Summary

- A pulsed multi-ion linac is based on 5 MeV/u normal conducting section and 5 cryomodules of SC cavities
 - 44 MeV/u lead ions
 - 135 MeV polarized H^-
- Capable to accelerate light polarized ions
- Stripping injection of polarized H^- and D^- in a single pulse
- Multi-pulse, multi turn injection of heavy ions with electron cooling in the booster between the pulses
- The goal of pre-conceptual design is to provide beam parameters for the design of the booster
- Linac requires detailed conceptual design with the following cost estimate